

Compliances:

- * Designed to meet FAA L-810 requirements per AC 70/7460-1, operational range -55°C to +55°C
- * Designed in reference with ICAO Annex 14, Low Intensity Type A photometric requirements
- * ISO 9001:2022 Registered Quality System
- * Photometric testing conducted in accredited Thailand laboratory (reports available)

Description:

BSE OB.Light is a red steady-burning obstruction light used to mark tall structures that present hazards to air navigation. During night operation, these lights provide visual warning to pilots when installed in accordance with FAA AC 70/7460-1 and ICAO Annex 14 Low Intensity Type A guidelines.


Together with the BSE FAA L-810(F) flashing red obstruction light, operating at 30 flashes per minute (FPM), and BSE controllers, the OB.Light forms part of an integrated obstruction lighting system.

When applied individually, single or double BSE OB.Lights can be mounted directly to conduit risers and may be combined with a BSE controller's universal transfer & alarm relay for lamp backup and remote lamp-failure indication. Typically, one photoelectric controller is sufficient to provide automatic dusk-to-dawn activation in accordance with FAA recommendations.


All BSE OB.Lights include lens tethers for safety, with power consumption not exceeding 5-7 Watts per head.



Single Types



Double Types

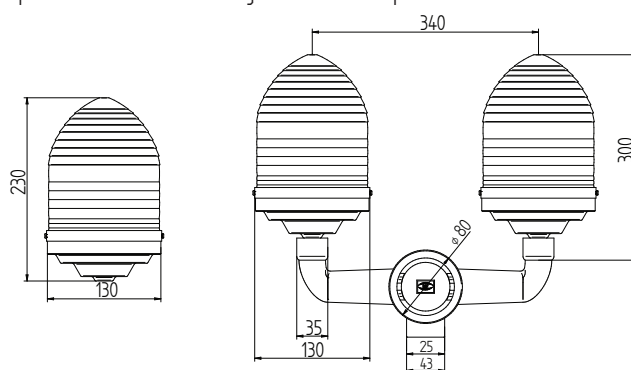

Dimension

Features:

- Automatic Flasher lamp with sensor
- Accepts traffic signal lamps with E27 base
- Operating voltage on 120 or 220 Vac 50-60 Hz power supply when used with proper voltage lamp
- Temperature range at -20° c to + 60° c
- Red color Acrylic lens globes for 360° visibility
- Yellow color ABS base
- Three way junction box cast iron body ; double only
- Threaded hub (3/4- inch) for mounting ; double only

MODEL:BSPL



B.S.E Type	Power	Specification	Lens Color	Style
BSAF1220R5E27	220V AC 5Watts	FAA L-810 8	RED Clear	Single Types
BSAF2220R5E27		ICAO Low Types A		Double Types

5w


Lifespan of the red LED light bulb is 4,000 hours at 120 Volts or 8,000 hours at 220-240 Volts. For LED lamp usage, the lifespan exceeds 100,000 hours. Accepts traffic signal lamps with USA medium screw base and European **E27 base**.



B.S.E Type	Power	Specification	Lens Color	Style
BSAF1220F7	220V AC 7Watts	FAA L-810 8	RED	Single Types
BSAF2220F7		ICAO Low Types A		Double Types

7w

Lifespan of the warm white LED light bulb is 4,000 hours at 120 Volts or 20,000 hours at 220-240 Volts. Accepts traffic signal lamps with USA medium screw base and European **E27 base**.

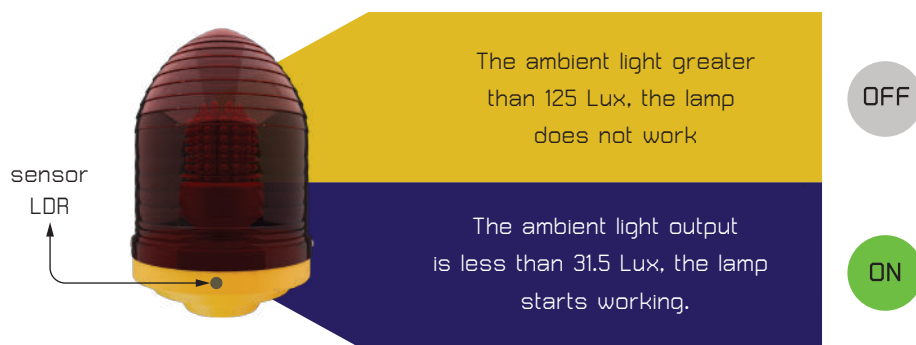

The sensor will activate at dusk and deactivate when it becomes bright.

"The limitation for dual lamps is that they will not flash simultaneously due to having separate sensors."

FAA configurations

FAA RED lighting Type A-Painted Tower / RED lights for night

